



Multilink Product Display

Point-Of-Purchase Packaging

Fiber Distribution Products

Volume 19

Table Of Contents

Rack Mount Fiber Distribution Units	4-10
Wall Mount Fiber Distribution Units	11-17
Preterminated Order Guide	18-19
Fiber Optic Adapters	20-21
Fiber Adapter Panels, Blank	22
Fiber Adapter Panels, Loaded	23-25
Fiber Jumpers, Single Mode, Simplex	26
Fiber Jumpers, Single Mode, Duplex	27
Fiber Jumpers, Single Mode, Hybrid	28
Fiber Jumpers, Multi Mode, Simplex	29
Fiber Jumpers, Multi Mode, Duplex	30
Fiber Jumpers, Multi Mode, Hybrid	31
Fiber Jumpers, 10 GIG, Multi Mode, Duplex	32
Multi Fiber Pigtailed	33
Fiber Management Spools	34
Fiber Management Straps & Ties	35
Tools & Test Equipment	36-38
Printers	39
Splice Trays	40



ENGINEERED TO MAKE THE DIFFERENCE! SINCE 1983

RACK MOUNT FIBER ENCLOSURES

Multilink's Family of Rack Mount Enclosures



Application

The Multilink family of rack mounted optical termination and in-rack splice enclosures are designed for the interconnection of patch cables, a combination of patching and splicing, or in-rack splicing. All of the enclosures are equipped with universal 19" or 23" rack mounting brackets. The product line supports from 2 to 24 termination panels in a variety of standard RU enclosures. Termination Shelves (TS) are designed with a slide out master panel shelf and allows for storage of splice trays behind the master termination panel. The Patch Splice (PS) enclosures have two separate slide out shelves: One with a termination master panel; the other with a tray support bracket and hinged trays. Swing out (SO) enclosures are designed for narrow depth applications with a hinged swing out master panel and splice tray storage.

Features & Benefits

- Steel and aluminum with a polyester powder coat finish in either standard Black or Off White
- Universal mounting with reversible 19" or 23" mounting brackets
- Swing out or Slide out master termination and splice tray panels
- Patching and splicing capabilities
- Removable front and rear doors for maximum access
- Improved access to network terminations or splices
- Flexibility in rack space with a variety of solutions
- Complete family of low, medium and high capacity distribution
- Available with Pre-terminated cabling or pigtailed

RACK MOUNT FIBER ENCLOSURES

Rack Mount Fiber Optic Distribution Solutions

Multilink in-rack mounted termination enclosures are designed to provide connectivity and distribution solutions. Enclosures are supplied with universal mounting hardware for 19" or 23" mounting. Slide out and swing out master panel style enclosures are designed to support the storage of splice trays. Each enclosure can be ordered fully terminated with cabling or pigtails from the factory, saving valuable installation time and in-field labor expenses. Products with your customized logo are available for OEM or other applications. Units are available in standard Black or Off White.

Swing-Out Style Fiber Distribution Units



FRM-1RU-2X-SO

Stock ID	10-4323 (Black) 10-4325 (Off White)
Description	Rack Mount FDU 1RU in Height with 2 termination panel capacity and swing out master panel tray
Dimensions	1.75" H x 17" W x 11.0" D
Weight	11 lbs.
Material	16 GA Powder Coated Steel
Capacity	(2) Panels
Splice Tray	(2) 1120-SSTA



FRM-2RU-4X-SO

Stock ID	10-4327 (Black) 10-4326 (Off White)
Description	Rack Mount FDU 2RU in Height with 4 termination panel capacity and swing out master panel tray
Dimensions	3.5" H x 17" W x 11.0" D
Weight	12 lbs.
Material	16 GA Powder Coated Steel
Capacity	(4) Panels
Splice Tray	(4) 1120-SSTA

RACK MOUNT FIBER ENCLOSURES

Rack Mount Fiber Optic Distribution Solutions

Multilink in-rack mounted termination enclosures are designed to provide connectivity and distribution solutions. Enclosures are supplied with universal mounting hardware for 19" or 23" mounting. Slide out and swing out master panel style enclosures are designed to support the storage of splice trays. Each enclosure can be ordered fully terminated with cabling or pigtails from the factory, saving valuable installation time and in-field labor expenses. Products with your customized logo are available for OEM or other applications. Units are available in standard Black or Off White.

Slide-Out Removable Top Style Fiber Distribution Units



FRM-1RU-3X-TS

Stock ID	045-115-10 (Black) 045-115-11 (Off White)
Description	Rack Mount FDU 1RU in Height with 2 termination panel capacity and slide out master panel tray
Dimensions	1.75" H x 17" W x 14.0" D
Weight	15.27 lbs.
Material	.060" Powder Coated Steel
Capacity	(3) Panels
Splice Tray	(2) 2000-SSTA



FRM-2RU-6X-TS

Stock ID	045-083-10 (Black) 045-083-11 (Off White)
Description	Rack Mount FDU 2RU in Height with 6 termination panel capacity and slide out master panel tray
Dimensions	3.50" H x 17" W x 14.0" D
Weight	
Material	.060" Powder Coated Steel
Capacity	(6) Panels
Splice Tray	(3) 2000-SSTA

RACK MOUNT FIBER ENCLOSURES

Slide-Out Style Fiber Distribution Units



FRM-2RU-4X-TS

STEEL	Stock ID	10- 4457 (Black) 10- 4531 (Off White)
	Description	Rack Mount FDU 2RU in Height with 4 termination panel capacity and slide out master panel tray
	Dimensions	3.5" H x 17" W x 14.0" D
	Weight	22 lbs.
	Material	.060" Powder Coated Steel
	Capacity	(4) Panels
	Splice Tray	(2) 2000-SSTA

ALUMINUM	Stock ID	10- 4533 (Black) 10- 4453 (Off White)
	Description	Rack Mount FDU 2RU in Height with 4 termination panel capacity and slide out master panel tray
	Dimensions	3.5" H x 17" W x 14.0" D
	Weight	11 lbs.
	Material	.060" Powder Coated Aluminum
	Capacity	(4) Panels
	Splice Tray	(2) 2000-SSTA



FRM-3RU-6X-TS

STEEL	Stock ID	10-4538 (Black) 10-4541 (Off White)
	Description	Rack Mount FDU 3RU in Height with 6 termination panel capacity and slide out master panel tray
	Dimensions	5.25" H x 17" W x 14.0" D
	Weight	24 lbs.
	Material	.060" Powder Coated Steel
	Capacity	(6) Panels
	Splice Tray	(3) 2000-SSTA

ALUMINUM	Stock ID	10-4540 (Black) 10-4455 (Off White)
	Description	Rack Mount FDU 3RU in Height with 6 termination panel capacity and slide out master panel tray
	Dimensions	5.25" H x 17" W x 14.0" D
	Weight	12 lbs.
	Material	.060" Powder Coated Aluminium
	Capacity	(6) Panels
	Splice Tray	(3) 2000-SSTA



FRM-4RU-12X-TS

STEEL	Stock ID	10-4534 (Black) 10-4537 (Off White)
	Description	Rack Mount FDU 4RU in Height with 12 termination panel capacity and slide out master panel tray
	Dimensions	7.0" H x 17" W x 14.0" D
	Weight	26 lbs.
	Material	14 GA Powder Coated Steel
	Capacity	(12) Panels
	Splice Tray	(8) 2000-SSTA

ALUMINUM	Stock ID	10-4536 (Black) 10-4456 (Off White)
	Description	Rack Mount FDU 4RU in Height with 12 termination panel capacity and slide out master panel tray
	Dimensions	7.0" H x 17" W x 14.0" D
	Weight	14 lbs.
	Material	.060" Powder Coated Aluminium
	Capacity	(12) Panels
	Splice Tray	(8) 2000-SSTA

RACK MOUNT FIBER ENCLOSURES (con't)

Slide-Out Style Fiber Distribution Units



FRM-8.5RU-24X-TS

Stock ID	10-4546 (Black) 10-4545 (Off White)
Description	Rack Mount FDU 8.5RU in Height with 24 termination panel capacity and dual slide out master panel trays
Dimensions	14.88" H x 17" W x 14.0" D
Weight	19 lbs.
Material	.060" Powder Coated Aluminium
Capacity	(24) Panels
Splice Tray	(16) 2000-SSTA (8 trays on each Slide out Master Panel Tray)


RACK MOUNT FIBER ENCLOSURES

Slide-Out Style Combination Patch & Splice Distribution Units



FRM-4RU-4X-PS (Includes 1 splice tray)

Stock ID	10-5270 (Black) 10-2146 (Off White)
Description	Rack Mount FDU 4RU in with 4 termination panel capacity and separate splice tray compartment with dual slide out master panel and splice trays
Dimensions	7.0" H x 17" W x 14.0" D
Weight	15 lbs.
Material	.060" Powder Coated Aluminum
Capacity	(4) Panels
Splice Tray	(2) 4048-SSTP

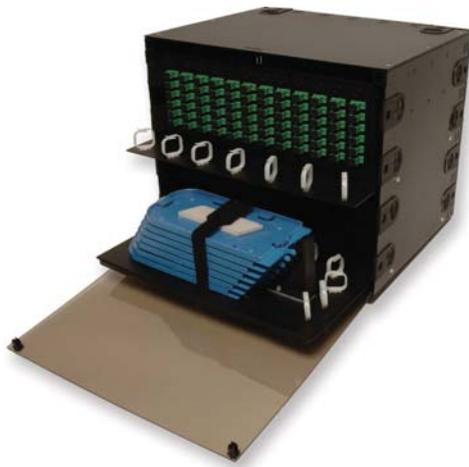

FRM-8.5RU-12X-PS (Includes 1 splice tray)

Stock ID	10-8584 (Black) 10-8585 (Off White)
Description	Rack Mount FDU 8.5RU in Height with 12 termination panel capacity and separate dual slide out master panel and splice trays
Dimensions	14.88" H x 17" W x 14.0" D
Weight	19 lbs.
Material	.060" Powder Coated Aluminum
Capacity	(12) Panels
Splice Tray	(8) 4048-SSTP

RACK MOUNT FIBER ENCLOSURES

Slide-Out Style Splice Shelves




FRM-3RU-SS

Stock ID	10-8572 (Black) 10-8574 (Off White)
Description	Rack Mount 3RU in Height slide out master Splice tray support panel
Dimensions	5.25" H x 17" W x 14.0" D
Weight	-
Material	.060" Powder Coated Aluminum
Capacity	(4) 24 Fiber Splice Trays
Splice Tray	(4) 4048-SSTP



FRM-4RU-SS

Stock ID	10-8568 (Black) 10-8570 (Off White)
Description	Rack Mount 4RU in Height slide out master Splice tray support panel
Dimensions	7.0" H x 17" W x 14.0" D
Weight	-
Material	.060" Powder Coated Aluminum
Capacity	(8) 24 Fiber Splice Trays
Splice Tray	(8) 4048-SSTP

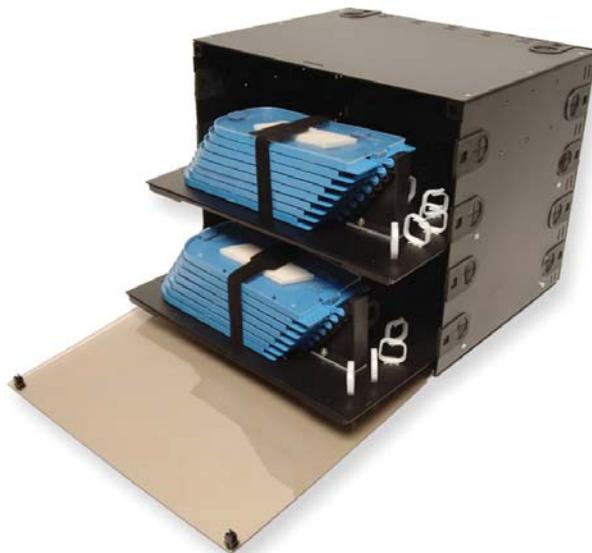

FRM-8.5RU-SS

Stock ID	10-8558 (Black) 10-8583 (Off White)
Description	Rack Mount 8.5RU in Height slide out master Splice tray support panel
Dimensions	14.88" H x 17" W x 14.0" D
Weight	-
Material	.060" Powder Coated Aluminum
Capacity	(16) 24 Fiber Splice Trays (8 on each shelf)
Splice Tray	(16) 4048-SSTP

RACK MOUNT FIBER ENCLOSURES

In-Rack Patch Enclosure Solutions



FF-RM-12X

Stock ID	10-1038 (Black) 10-6450 (Off White)
Description	Rack Mount 4RU in Height fixed master panel with integrated horizontal and vertical jumper guides
Dimensions	7.0" H x 17" W x 14.0" D
Weight	9.5 lbs.
Material	.060" Powder Coated Aluminum
Capacity	(12) Panels

WALL MOUNT FIBER ENCLOSURES

Multilink's Family of Wall Mount Enclosures



The Multilink family of wall mounted optical termination enclosures are designed to provide solutions for both the interconnection of patch cabling and a combination of patching and splicing. The family accommodates from a single termination panel up to 16 termination panels. Depending on the type of optical termination panel used, enclosures can support up to 192 terminations. The family of enclosures is separated into several application specific groups to support the level of termination capacity and feature sets required for the enclosures mount location.

Features & Benefits

- Durable Steel or Aluminum with a polyester powder coat finish in either standard Black or Off White.
- Several units are designed with additional means of security but maintaining ease in access for craft personnel.
- Individual compartments for separation of network and distribution terminations.
- Wide range of sizes and feature sets to accommodate specific application requirements.
- Easy to install, load, and maintain.
- Available with loaded termination panels and pre-connectorized pigtailed.
- Durable construction.

WALL MOUNT FIBER ENCLOSURES

Standard Single Outer Door Fiber Distribution Units

Multilink wall mount enclosures are designed to provide connectivity and distribution solutions. Enclosures are divided into several groups to meet application specific requirements such as Construction Grade, Single Door, Dual Door, Added Security, NEMA 4 and NEMA 12. Products with your customized logo are available for OEM or other applications. Units are available in standard Black or Off White unless specified.

MultiLite Construction Grade Fiber Distribution Units



WM-2X

Stock ID	10-7944 Black Only
Description	Wall mount single outer door construction grade distribution unit with 2 termination panel capacity
Dimensions	9.25" H x 13" W x 3.5" D
Weight	7 lbs.
Material	18 GA Powder Coated Steel
Capacity	(2) Panels
Splice Tray	(2) 1120-SSTA



WM-4X

Stock ID	10-7945 Black Only
Description	Wall mount single outer door construction grade distribution unit with 4 termination panel capacity
Dimensions	11.5" H x 13" W x 3.5" D
Weight	-
Material	18 GA Powder Coated Steel
Capacity	(4) Panels
Splice Tray	(4) 1120-SSTA




WM-8X

Stock ID	10-7790 Black Only
Description	Wall mount single outer door construction grade distribution unit with inner network compartment security door and 8 termination panel capacity
Dimensions	12" H x 17" W x 6" D
Weight	-
Material	18 GA Powder Coated Steel
Capacity	(8) Panels
Splice Tray	(8) 1120-SSTA

WALL MOUNT FIBER ENCLOSURES

Standard Single Outer Door Fiber Distribution Units

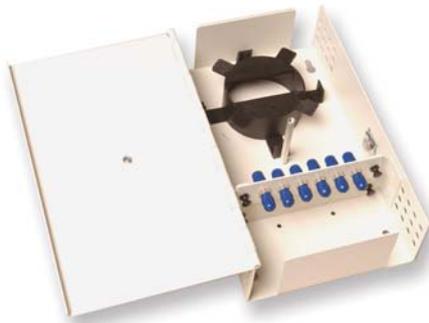

FF-Mini-WM12

Stock ID	10-5818 (Black) 10-2661 (Off White)
Description	Wall mount single outer door compact distribution unit with 2 termination panel capacity
Dimensions	10" H x 6" W x 2.5" D
Weight	5 lbs.
Material	16 GA Powder Coated Steel
Capacity	(2) Panels
Splice Tray	(1) 1120-SSTA



FF-FOH (Splice Only)

Stock ID	70914K (Off White Only)
Description	Wall mount single outer door compact distribution unit with 2 termination panel capacity
Dimensions	10" H x 6" W x 2.5" D
Weight	5 lbs.
Material	18 GA Powder Coated Steel
Splice Tray	(1) 1120-SSTA



FWM012XLC

Stock ID	10-2012 (Black) 10-2730 (Off White)
Description	Wall mount single outer door distribution unit with inner network compartment security door and 2 termination panel capacity
Dimensions	10.2" H x 12" W x 3.5" D
Weight	8 lbs.
Material	18 GA Powder Coated Steel
Capacity	(2) Panels
Splice Tray	(2) 1120-SSTA



FWM024XLC

Stock ID	10-1914 (Black) 10-2714 (Off White)
Description	Wall mount single outer door distribution unit with inner network compartment security door and 4 termination panel capacity
Dimensions	12" H x 12" W x 3.5" D
Weight	9 lbs.
Material	18 GA Powder Coated Steel
Capacity	(4) Panels
Splice Tray	(4) 1120-SSTA

WALL MOUNT FIBER ENCLOSURES

Standard Dual Door Fiber Distribution Units



FWM012XD

Stock ID	99009BK (Black) 99009K (Off White)
Description	Wall mount dual outer door distribution unit with captive screw fasteners on both doors and 2 termination panel capacity
Dimensions	10.2" H x 12.5" W x 3.5" D
Weight	9 lbs.
Material	16 GA Powder Coated Steel
Capacity	(2) Panels
Splice Tray	(2) 1120-SSTA



FWM024X

Stock ID	99024BK (Black) 99024K (Off White)
Description	Wall mount dual outer door distribution unit with lockable network compartment door and 4 termination panel capacity
Dimensions	10.8" H x 12" W x 4" D5
Weight	10 lbs.
Material	16 GA Powder Coated Steel
Capacity	(4) Panels
Splice Tray	(4) 1120-SSTA



FWM054X

Stock ID	10-5283 (Black) 10-5281 (Off White)
Description	Wall mount dual outer door distribution unit with lockable network and distribution compartment doors and 9 termination panel capacity
Dimensions	17" H x 21.2" W x 5" D
Weight	21 lbs.
Material	16 GA Powder Coated Steel
Capacity	(9) Panels
Splice Tray	(3) 2000-SSTA




FWM312410

Stock ID	10-3800 (Off White Only)
Description	Wall mount dual outer door distribution unit with lockable network compartment door and 16 termination panel capacity
Dimensions	31" H x 24" W x 10" D
Weight	24 lbs.
Material	.063 Aluminum
Capacity	(16) Panels
Splice Tray	(8) 2000-SSTA

WALL MOUNT FIBER ENCLOSURES

Added Security Dual Door Fiber Distribution Units

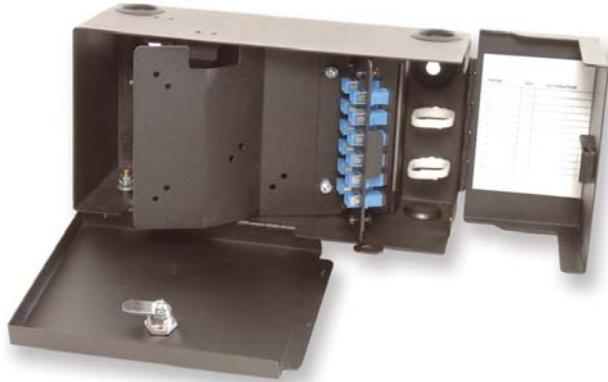

FF-WM-012

Stock ID	10-4469 (Black) 10-2539 (Beige) 10-6707 (Off White)
Description	Compact wall mount dual outer door distribution unit with 2 termination panel capacity and integrated network compartment work shelf and removable style door
Dimensions	6" H x 12" W x 4.5" D
Weight	8 lbs.
Material	16 GA Powder Coated Steel
Capacity	(2) Panels
Splice Tray	(1) 1120-SSTA



FF-WM-024

Stock ID	10-4462 (Black) 10-6706 (Beige) 10-2542 (Off White)
Description	Compact wall mount dual outer door distribution unit with 4 termination panel capacity and integrated network compartment work shelf and removable style door
Dimensions	11" H x 14" W x 4.5" D
Weight	12 lbs.
Material	16 GA Powder Coated Steel
Capacity	(4) Panels
Splice Tray	(2) 1120-SSTA



FF-WM-8X

Stock ID	045-030-10 (Black) 045-030-11 (Off White)
Description	Compact wall mount dual outer door distribution unit with 8 termination panel capacity and integrated network compartment and removable door
Dimensions	16" H x 20" W x 6.5" D
Weight	-
Material	16 GA Powder Coated Steel
Capacity	(8) Panels
Splice Tray	(4) 2000-SSTA

WALL MOUNT FIBER ENCLOSURES NEMA Rated Distribution Units



FWM-2X-N4 (with termination panel)
FWM-0X-N4 (without termination panel)
ICM-2X (optional termination panel)

Stock ID	10-4870 - FWM-2X-N4 (Beige Only) 10-9867 - FWM-0X-N4 (Beige Only) 10-7812 - ICM-2X
Description	Wall mount NEMA 4 distribution unit with lockable and removable single outer door. Available as a 2 panel termination and splice or splice only unit
Dimensions	17.5" H x 9" W x 4" D
Weight	-
Material	16 GA Powder Coated Steel
Capacity	(2) Panels
Splice Tray	(2) 1120-SSTA (4 trays if no termination panel unit used)



FWM-2X-N4D

Stock ID	045-060-10 (Beige Only)
Description	Wall mount NEMA 4 single outer door distribution unit with lockable network compartment door and 2 termination panel capacity
Dimensions	12.5" H x 12.5" W x 5.75" D
Weight	-
Material	.08" Powder Coated Aluminum
Capacity	(2) Panels
Splice Tray	(2) 1120-SSTA



FWM-4X-N4D

Stock ID	045-080-10 (Beige Only)
Description	Wall mount NEMA 4 single outer door distribution unit with lockable network compartment door and 4 termination panel capacity
Dimensions	14" H x 14" W x 7" D
Weight	-
Material	.08" Powder Coated Aluminum
Capacity	(4) Panels
Splice Tray	(4) 2000-SSTA or 1120-SSTA



FWM-12X-N4D

Stock ID	045-042-10 (Beige Only)
Description	Wall mount NEMA 4 single outer door distribution unit with lockable network compartment door and 12 termination panel capacity
Dimensions	19.7" H x 18.4" W x 9.8" D
Weight	-
Material	.08" Powder Coated Aluminum
Capacity	(12) Panels
Splice Tray	(6) 2000-SSTA

WALL MOUNT FIBER ENCLOSURES NEMA Rated Distribution Units



FWM-RNI24X

Stock ID	99025BSTK (BLK, ST Plate) 13004RNI (Gasket Kit)
Description	Wall mount NEMA 12 dual outer door distribution unit with lockable network compartment door and 24 termination capacity. Optional gasket for additional protection. Call Customer Service for SC or FC applications
Dimensions	17.25" H x 11.25" W x 4" D
Weight	5 lbs.
Material	Impact and Weather Resistant Plastic
Capacity	(24) ST, SC or FC Terminations
Splice Tray	(2) 1120-SSTA



FWM-RNI48X


Stock ID	99049K (Ivory, ST Plate) 30669 (RNI - 48X / Optional Gasket Kit)
Description	Wall mount NEMA 12 dual outer door distribution unit with lockable network compartment door and 48 termination capacity. Optional gasket for additional protection. Call Customer Service for SC or FC applications
Dimensions	20" H x 10" W x 5.6" D
Weight	5 lbs.
Material	Impact and Weather Resistant Plastic
Capacity	(48) ST, SC or FC Terminations
Splice Tray	(4) 1120-SSTA



FF-OCS036

Stock ID	10-3338 (Gray Only)
Description	Wall mounted NEMA 1, 2, 3S, 4, 4X, 12 & 13 rated enclosure with a single outer door and inner network security door. 6 Panel termination capacity and field drilled cable entries using standard weather tight conduit fittings.
Dimensions	16" H x 14" W x 7" D
Weight	10 lbs.
Material	Impact and Weather Resistant Plastic
Capacity	(6) Panels
Splice Tray	(4) 1120-SSTA

PRETERMINATED ENCLOSURES

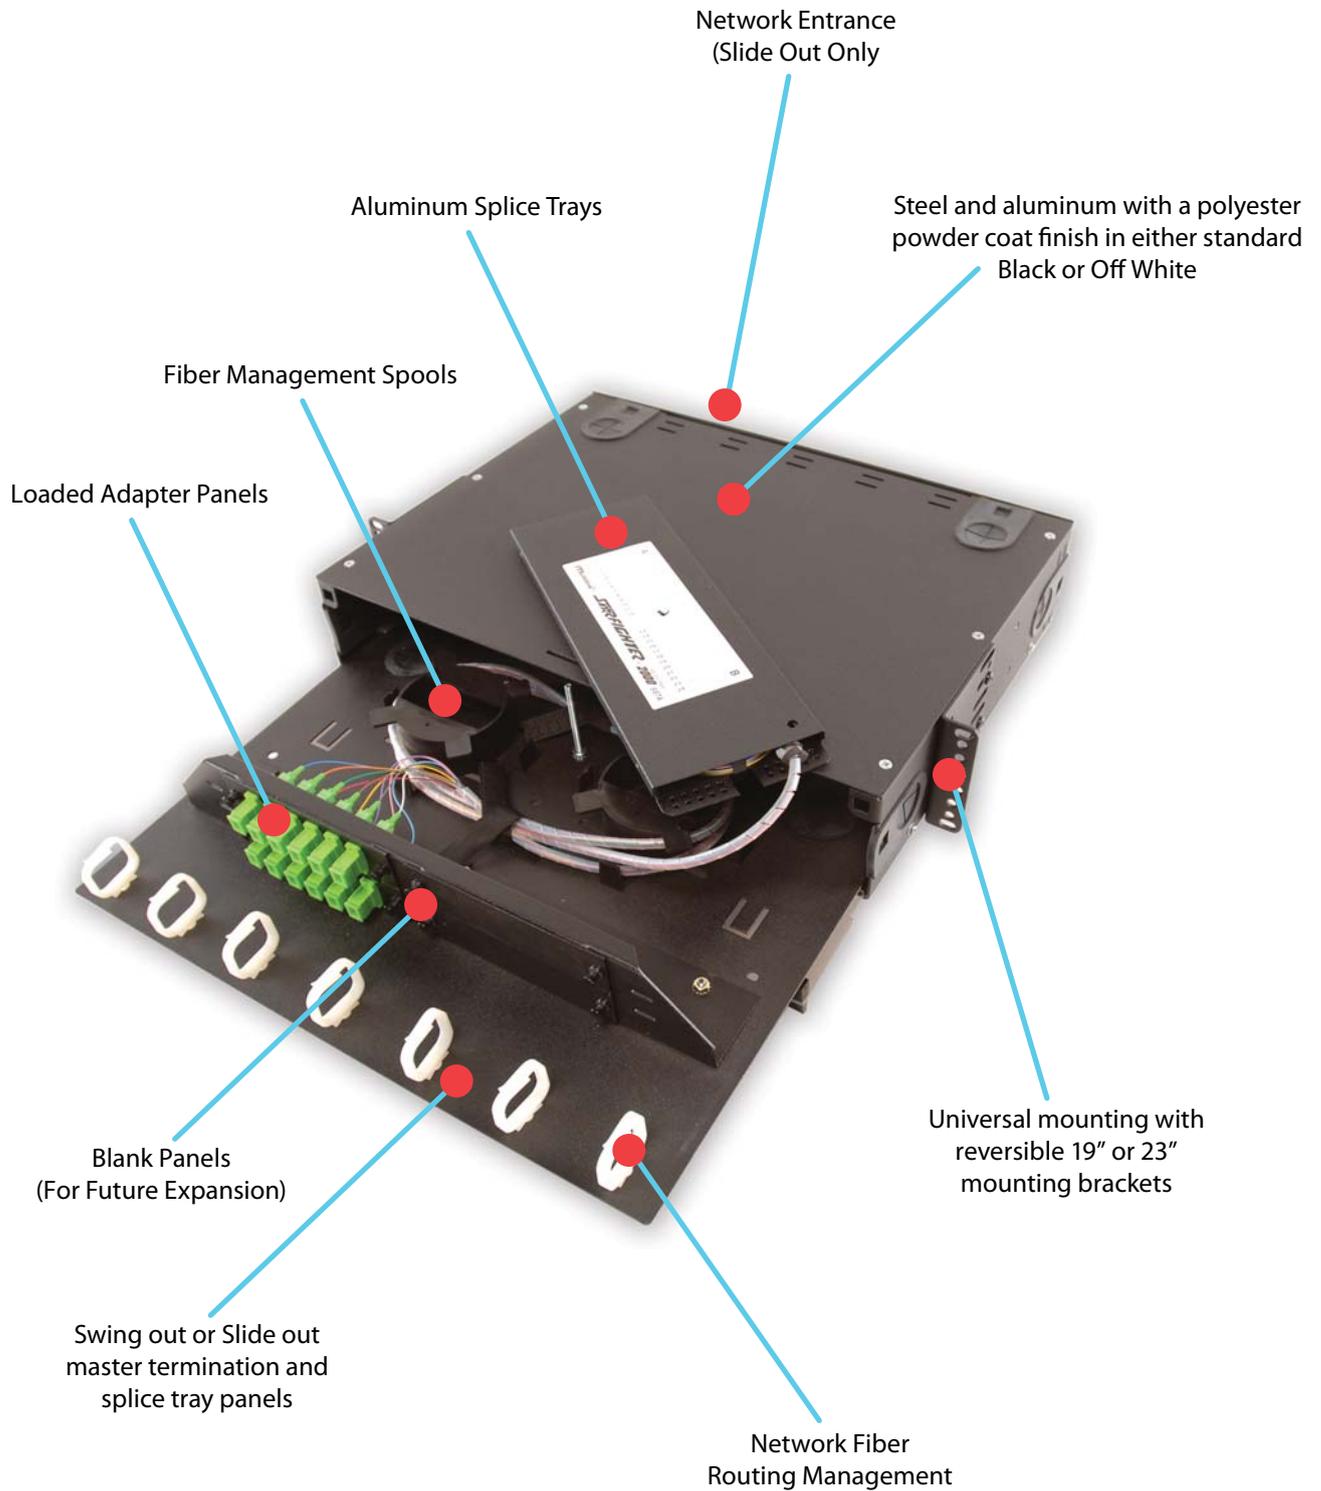

PRETERMINATED ORDERING GUIDE

Rack and Wall Mount FDU Configurator

Example Configuration:

ML 02 24 B ST6 MP 003 21 12

Translates:

FWM024XLC, 24 loaded ports, Black, ST 6 Port Multimode, Multifiber pigtails, 3 meters in length, equipped with 2 of the 1120-SSTA trays

Enclosure Type	# Of Conn.	Color	Adapter	Pigtail	Length (Meters)	Splice Tray***	Splice Count
WALL MOUNTS							
01 FWM012XLC	006	OW=O	SCS=SC Simplex MM	00=None	00X**	X1=1120-SSTA	12
	012	BLK=B	SCD=SC Duplex MM	T9=900um		X2=2000-SSTA	24
02 FWM024XLC	018	Beige=BE*	SUS=SC Simplex SM	T3=3mm		X3=2020-SSTP	
	024		SUD=SC Duplex SM	MD=Module		X4=4048-SSTP	
03 FF-MINI-WM12	030		SAS=SC/APC Simplex SM	MP=Multifiber		X denotes number of trays	
	036		SAD=SC/APC Duplex SM	OSP=OSP Dielectric Cable			
04 FF-FOH	042		FC=FC MM	OSA=OSP Armored Cable			
	048		FU=FC SM	DST=Distribution Cable			
05 FF-WM-012	054		FA=FC/APC				
	060		LCS=LC Simplex MM				
06 FF-WM-024	066		LCD=LC Duplex MM				
	072		LUS=LC Simplex SM				
07 FWM012XD	096		LUD=LC Duplex SM				
	144		LAS=LC/APC Simplex SM				
08 FWM024X	288		LAD=LC/APC Duplex SM				
			ST6=ST 6 port MM				
09 FWM054X			ST8=ST 8 port MM				
			ST12=ST 12 port MM				
10 FWM-312410			SM6=ST 6 port SM				
			SM8=ST 8 port SM				
11 FF-OCS036			SM12=ST 12 port SM				
			MJ=MTRJ				
22 FWM-2X-N4							
23 FWM-2X-N4D							
24 FWM-4X-N4D							
25 FWM-12X-N4D							
26 WM-2X (Multilite)							
27 WM-4X (Multilite)							
28 WM-8X (Multilite)							
29 FF-WM-8X							
RACK MOUNTS							
12 FRM-1RU-2X-SO							
13 FRM-2RU-4X-SO							
14 FRM-2RU-4X-TS							
30 FRM-2RU-6X-TS							
15 FRM-3RU-6X-TS							
16 FRM-4RU-12X-TS							
17 FRM-8.5RU-24X-TS							
18 FRM-4RU-4X-PS							
19 FRM-8.5RU-12X-PS							
20 FF-RM-12X							
21 FRM-1RU-3X-TS							

** Feet divided by 2.54 and rounded up to the full meter.

* Only available for specified boxes. Refer to catalog descriptions.

*** Align with unit type.

FIBER OPTIC ADAPTERS

	Stock ID	Type	Fiber Polish	Mode	Sleeve Material	Color	Foot Print
	99306	ST	Any	MM	Phos. Bronze	Chrome	ST
	99307	ST	Any	SM	Ceramic	Chrome	ST
	99309	FC	Any	MM	Phos. Bronze	Chrome	FC
	99310	FC	Any	SM	Ceramic	Chrome	FC
	10-1688	MTRJ	PC	MM	Phos. Bronze	Black	MTRJ
	10-5382	SC Simplex	PC	MM	Phos. Bronze	Beige	SC Simplex
	99302	SC Duplex	PC	MM	Phos. Bronze	Beige	SC Duplex
	99304	SC Simplex	UPC	SM	Ceramic	Blue	SC Simplex
	10-5513	SC Duplex	UPC	SM	Ceramic	Blue	SC Duplex
	10-3642	SC Simplex	APC	SM	Ceramic	Green	SC Simplex
	10-5378	SC Duplex	APC	SM	Ceramic	Green	SC Duplex
	065-236-10	SC Simplex 10 GIG	PC	MM	Phos. Bronze	Aqua	SC Simplex
	065-237-10	SC Duplex 10 GIG	PC	MM	Phos. Bronze	Aqua	SC Duplex

FIBER OPTIC ADAPTERS

	Stock ID	Type	Fiber Polish	Mode	Sleeve Material	Color	Foot Print
	10-9711	LC Duplex	PC	MM	Phos. Bronze	Beige	LC Duplex
	10-4605	LC Duplex	UPC	SM	Ceramic	Blue	LC Duplex
	065-240-10	LC Duplex 10 GIG	PC	MM	Phos. Bronze	Aqua	SC Simplex
	065-238-10	LC Quad	PC	MM	Phos. Bronze	Beige	SC Duplex
	065-239-10	LC Quad	UPC	SM	Ceramic	Blue	SC Duplex
	065-241-10	LC Quad 10 GIG	PC	MM	Phos. Bronze	Aqua	SC Duplex

FIBER ADAPTER PANELS - BLANK

	Stock ID	Model #	Conn. Type	# Of Conn. Holes	Plate Color
	10-1690	MTRJ-03-NB-BLK	MTRJ	6	Black
	10-1689	MTRJ-03-NB-OW			Off White
	10-6061	MSCB-06-BB-BLK	SC	6	Black
	10-6063	MSCB-06-BB-OW			Off White
	10-9103	MSCB-08-BB-BLK	SC	8	Black
	10-9101	MSCB-08-BB-OW			Off White
	10-5534	MSCBH-03-NB-BLK	SC DUPLEX	6	Black
	10-8187	MSCBH-03-NB-OW			Off White
	10-5455	MSTA-03-BB-BLK	ST	6	Black
	10-5450	MSTA-03-BB-OW			Off White
	10-9227	MSTA-08-BB-BLK	ST	8	Black
	10-9230	MSTA-08-BB-OW			Off White
	10-9188	MSTA-12-BB-BLK	ST	12	Black
	10-9189	MSTA-12-BB-OW			Off White
	10-4610	MLCD-03-NB-BLK	LC DUPLEX	6	Black
	10-4609	MLCD-03-NB-OW			Off White
	10-8750	MFCB-03-DB-BLK	FC	6	Black
	10-8752	MFCB-03-DB-OW			Off White
	065-226-10	MFCB-08-DB-BLK	FC	8	Black
	065-226-11	MFCB-08-DB-OW			Off White
	065-227-10	MFCB-12-DB-BLK	FC	12	Black
	065-227-11	MFCB-12-DB-OW			Off White
	10-7666	MFMB-600BB-BLK	-	0	Black
	10-7668	MFMB-600BB-OW			Off White

FIBER ADAPTER PANELS - LOADED

	Stock ID	Model #	Conn. Type	# Of Conn.	Ferrol	Mode	Fiber Polish	Conn. Color	Plate Color
	10-5458	MST-06-P-BLK	ST	6	Phos. Bronze	MM	PC UPC	Chrome	Black
	10-5457	MST-06-P-OW							Off White
	99234K	MST-06-C-BLK	ST	6	Ceramic	SM	Any	Chrome	Black
	99223K	MST-06-C-OW							Off White
	10-9228	MST-08-P-BLK	ST	8	Phos. Bronze	MM	PC UPC	Chrome	Black
	10-9229	MST-08-P-OW							Off White
	10-9236	MST-08-C-BLK	ST	8	Ceramic	SM	Any	Chrome	Black
	10-6066	MST-08-C-OW							Off White
	10-9196	MST-12-P-BLK	ST	12	Phos. Bronze	MM	PC UPC	Chrome	Black
	10-9195	MST-12-P-OW							Off White
	10-6065	MST-12-C-BLK	ST	12	Ceramic	SM	Any	Chrome	Black
	10-6177	MST-12-C-OW							Off White
	10-5095	MFC-06-P-BLK	FC	6	Phos. Bronze	MM	PC UPC	Chrome	Black
	10-8751	MFC-06-P-OW							Off White
	10-4744	MFC-06-C-BLK	FC	6	Ceramic	SM	Any	Chrome	Black
	99218CK	MFC-06-C-OW							Off White
	065-217-50	MFC-08-P-BLK	FC	8	Phos. Bronze	MM	PC UPC	Chrome	Black
	065-217-51	MFC-08-P-OW							Off White
	065-217-10	MFC-08-C-BLK	FC	8	Ceramic	SM	Any	Chrome	Black
	065-217-11	MFC-08-C-OW							Off White
	065-218-50	MFC-12-P-BLK	FC	12	Phos. Bronze	MM	PC UPC	Chrome	Black
	065-218-50	MFC-12-P-OW							Off White
	065-218-10	MFC-12-C-BLK	FC	12	Ceramic	SM	Any	Chrome	Black
	065-218-11	MFC-12-C-OW							Off White
	10-3628	MTRJ-12-MM-P-BLK	MTRJ	6	Phos. Bronze	MM	PC UPC	Black	Black
	10-3629	MTRJ-12-MM-P-OW							Off White

Multilink[®]

25 YEARS

ENGINEERED TO MAKE THE DIFFERENCE! SINCE 1983

WORLDWIDE SALES, SERVICES AND MANUFACTURING



HOME OFFICE

E-Mail: engsupport@multilinkone.com
587 Ternes Avenue • P.O. Box 955 • Elyria, OH 44035
Phone: 440.366.6966 • Fax: 440.366.6802
24 Hour Voice Messaging • Worldwide Distribution

© Multilink, Inc. • All Rights Reserved • Volume 19 • CA-300-058 May 2008

FOR MORE INFORMATION
www.multilinkone.com

